



REV	DATE	DESCRIPTION	DESIGNED	CHECK	APPROVED

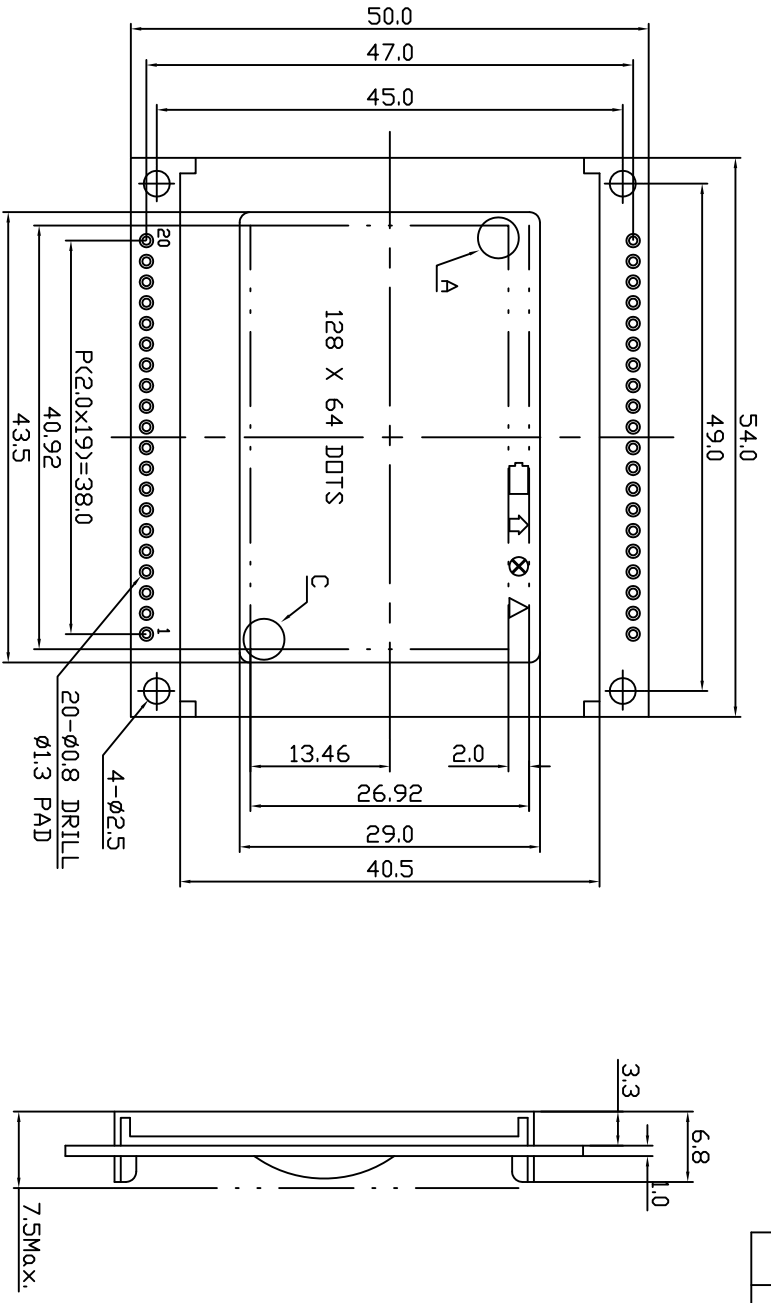

Pin No.	1	2	3	4	5	6	7~14	15	16	17	18	19	20
Symbol	V _S	V _{DD}	V _D	D/I	R/W	E	DB0~DB7	CS1	CS2	RST	V _{OUT}	A	K

NOTE:

1. DISPLAY MODE: STN-Y/G, POSITIVE/TRANSPLECTIVE
2. VIEWING DIRECTION: 6:00
3. OPERATION TEMP: -20° C - +70° C
4. STORAGE TEMP: -30° C - +80° C
5. DRIVE METHOD: 1/128DUTY, 1/12BIAS
6. CONTROLLER: NT7086
7. VDD=5.0V/3.3V, COLOR: WHITE